


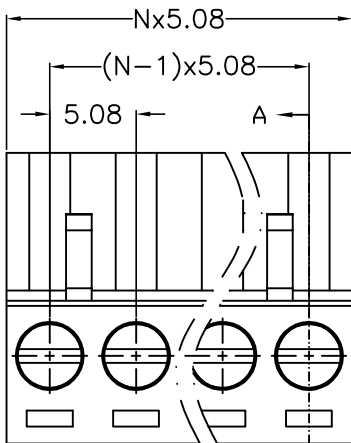



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2024.9.22	ZHANG	JIN

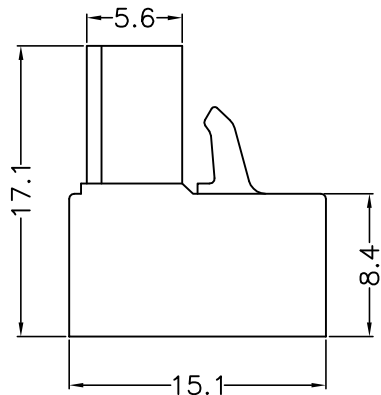

2P

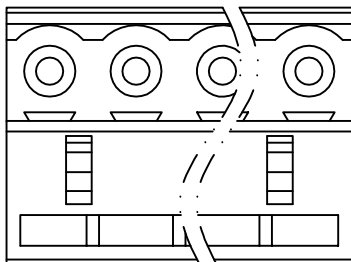

A



SECTION A-A


- Material
 - ØScrew : M3.0 steel, Zinc plated,“-”slot type
 - ØHousing : PA66, UL94V-0
 - ØContact : Copper alloy,Tin plated
 - ØClamp : Copper alloy, Ni plated
 - ØCover : PA66, UL94V-0

- Electrical
 - UL IEC
 - Rated voltage : 300V 320V
 - Rated current : 15A 20A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 28-12AWG 2.5mm²

- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Torque: 0.5N.m (4.43Lb.in)
 - Strip length: 7mm

- Conform to REACH and RoHS

HOW TO ORDER
KF2EDG-X-5.08-XXP-1 X-XXXX

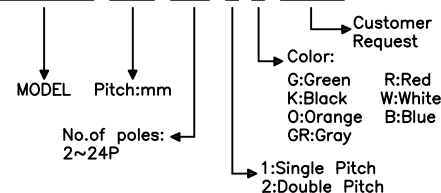

Pitch range	Nominal dimension range							PROJECTION	UNIT	TITLE
>0 ~6	>6 ~10	>10 ~24	>0 ~30	>30 ~60	>60 ~100	>100 ~150	>150	0.1/10	mm	KF2EDG-X-5.08-XXP-1X
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	A4	SERIES KF2EDG-X
DRAWING TYPE		CUSTOMER DRAWING								
SCALE		1:1	SHEET	1	OF	1				
DRAWING NO.		W10000582								

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD