
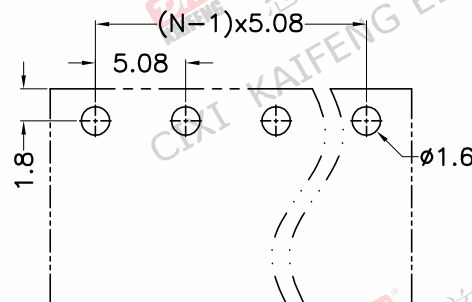

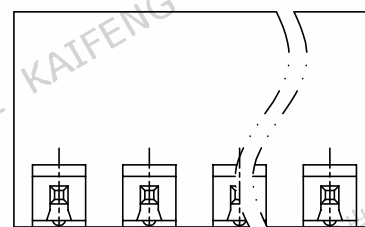



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

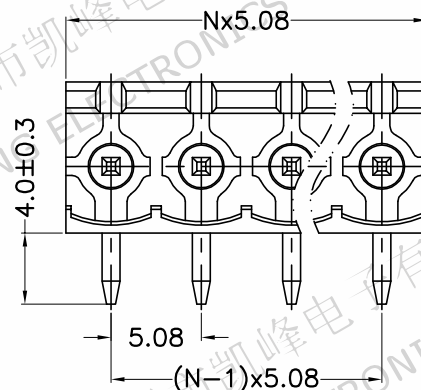


P.C.B.LAYOUT

- Material
 ØHousing : PA66, UL94V-0
 ØPin header : Copper alloy, Tin plated
- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 15A 20A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min
- Mechanical
 Operating temperature: -40℃ ~ +105℃
 Soldering temperature: 250℃ ± 5/5sec
- RoHS compliance

HOW TO ORDER

KF2EDGR-X-5.08-XXP-1 X-XXXXX

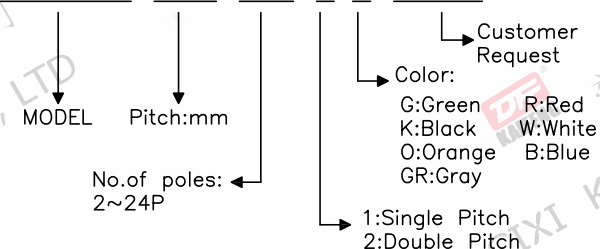

Pitch range	Nominal dimension range	PROJECTION	TITLE
>0 ~6	>0 ~30	UNIT	KF2EDGR-X-5.08-XXP-1X
>6 ~10	>30 ~60	SHEET SIZE	A4
>10 ~24	>60 ~100	SERIES	KF2EDGR-X
>24 ~30	>100 ~150		
>30 ~30	>150 ~150		
±0.15	±0.20		
±0.20	±0.30		
±0.30	±0.50		
±0.50	±0.70		
±0.70	±1.00		
±1.00	±1.30		
±1.30	±2*		
DRAWING TYPE	CUSTOMER DRAWING		
SCALE	1:1		
DRAWING NO.	W10000612		



慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD